




Cisco 7600 Series/Catalyst 6500 Series Services SPA Carrier-400

The Cisco® I-Flex design combines shared port adapters (SPAs) and SPA interface processors (SIPs), leveraging an extensible design that enables service prioritization for voice, video and data services. Enterprise and service provider customers can take advantage of improved slot economics resulting from modular port adapters that are interchangeable across Cisco routing platforms. The I-Flex design maximizes connectivity options and offers superior service intelligence through programmable interface processors that deliver line-rate performance. I-Flex enhances speed-to-service revenue and provides a rich set of QoS features for premium service delivery while effectively reducing the overall cost of ownership. This data sheet contains the specifications for the Cisco 7600 Series/Catalyst® 6500 Series Services SPA Carrier-400 (Cisco Services SPA Carrier-400; refer to Figure 1).

Product Overview

The Cisco Services SPA Carrier-400 helps enable high-performance IP Security (IPSec) VPN services for secure transport of mission-critical data across the network. It provides enterprises and service providers tremendous flexibility and density as they scale their network infrastructure and expand secure, remote services to branch offices and offsite users.

Figure 1. Cisco Services SPA Carrier-400 with Two Cisco IPSec VPN SPAs

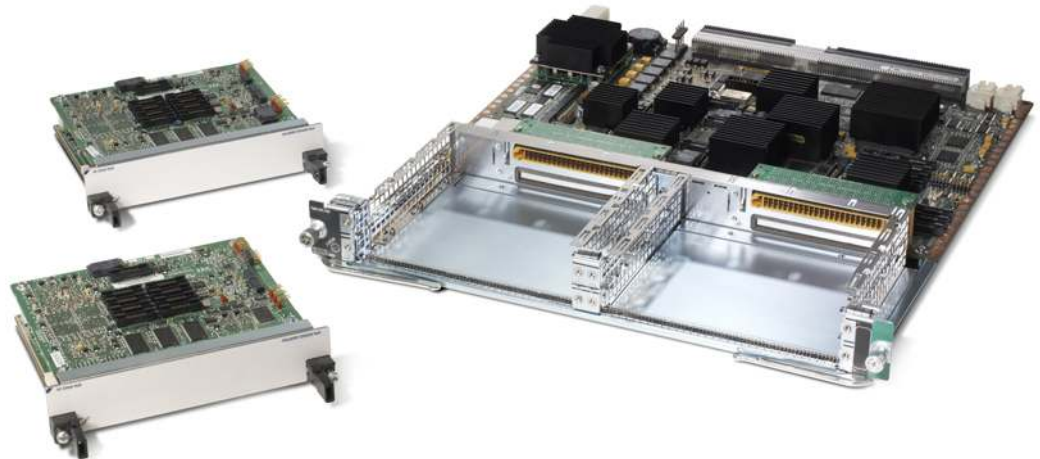

Cisco 7600 Series Routers and Cisco Catalyst 6500 Series Switches offer innovative, next-generation converged services for enterprises and service providers. The Cisco Services SPA Carrier-400 and Cisco 7600 Series/Catalyst 6500 Series IPSec VPN Shared Port Adapter (Cisco IPSec VPN SPA) form the cornerstone of the IPSec VPN technology, and they help enable tremendous cost savings and new revenue streams.

Features and Benefits

Table 1 gives the primary features of the Cisco Services SPA Carrier-400.

Table 1. Features and Benefits of Cisco Services SPA Carrier-400

Feature	Cisco Services SPA Carrier-400	Benefit
Modularity	Up to 2 Cisco IPsec VPN SPAs per Cisco Services SPA Carrier-400	Creates investment protection and offers flexibility across Cisco 7600 Series Routers and Cisco Catalyst 6500 Series Switches
Scalability	Up to 5 Cisco Services SPA Carrier-400 modules and 10 Cisco IPsec VPN SPAs in a Cisco 7600 or Cisco Catalyst 6500 chassis	Offers high-density, high-performance IPsec VPN services while maintaining attractive footprint and tremendous scalability
Switch Fabric Connectivity	Supported	Enables the use of 720-Gbps switch fabric modules for data forwarding
Online Insertion and Removal (OIR)	Supports OIR of both the Cisco Services SPA Carrier-400 and the Cisco IPsec VPN SPA	Increases high availability, and provides operational ease of use

Product Specifications

Table 2 gives specifications of the Cisco Services SPA Carrier-400.

Table 2. Product Specifications

Features	Descriptions
Compatibility	<ul style="list-style-type: none"> • Cisco 7600 Series/Catalyst 6500 Series Supervisor Engine 720, 720-3B, or 720-3BXL
Minimum Software Compatibility	<ul style="list-style-type: none"> • Cisco IOS® Software Release 12.2(18)SXE1 or later native Cisco IOS Software releases
Slot Configuration	<ul style="list-style-type: none"> • 2 double-height Cisco IPsec VPN SPA bays per Cisco Services SPA Carrier-400
Features and Benefits	<ul style="list-style-type: none"> • High performance—Offers a combined 5-Gbps packet forwarding (2.5 Gbps for each full-height, singlewide slot) capacity for high-density aggregation • Switch fabric connectivity—Allows system scalability up to 720 Gbps by offering switch fabric connectivity • OIR of the Cisco Services SPA Carrier-400 and the Cisco IPsec VPN SPAs • QoS and queuing <ul style="list-style-type: none"> ◦ 2 high and low queues ◦ Weighted Fair Queuing (WFQ) • Congestion avoidance <ul style="list-style-type: none"> ◦ Weighted Random Early Detection (WRED) • High availability <ul style="list-style-type: none"> ◦ Stateful failover ◦ OIR
Supported SPAs	<ul style="list-style-type: none"> • Cisco IPsec VPN SPA
Environmental Conditions	<ul style="list-style-type: none"> • Operating temperature: 32 to 104°F (0 to 40°C) • Storage temperature: –40 to 167°F (–20 to 70°C) • Relative humidity: 10 to 90%, noncondensing • Operating altitude: –60 to 2000m
Reliability and Availability	<ul style="list-style-type: none"> • OIR of the Cisco Services SPA Carrier-400 and the Cisco IPsec VPN SPAs
Network Management	<ul style="list-style-type: none"> • Supported with CiscoWorks—CiscoView and CiscoWorks Resource Manager Essentials (RME) • Cisco IP Solution Center (ISC)
Physical Specifications	<ul style="list-style-type: none"> • Occupies one slot in a Cisco Catalyst 6500 or Cisco 7600 • Requires Supervisor Engine 720, 720-3B, 720-3BXL, or Supervisor Engine 2 • Dimensions (H x W x D): 1.75 x 15.375 x 16 in • Dimensions (H x W x D): 4.45 x 39.05 x 40.64 cm
Power	<ul style="list-style-type: none"> • 150W power consumption per Cisco Services SPA Carrier-400 • 235W maximum power consumption with Cisco Services SPA Carrier-400 and two Cisco IPsec VPN SPAs
Indicators	<ul style="list-style-type: none"> • Cisco Services SPA Carrier-400 status: green (operational); orange (faulty)

Regulatory Compliance	EMC <ul style="list-style-type: none"> • FCC Part 15 (CFR 47) Class A • ICES-003 Class A • EN55022 Class A • CISPR22 Class A • AS/NZSCISPR Class A • VCCI Class A • EN55024 • EN300 386 • EN50082-1 • EN61000-3-2 • EN61000-3-3 Safety Compliance <ul style="list-style-type: none"> • UL 60950 • IEC 60825-1, -2 • IEC 60950 • EN 60950 • EN 60825-1, -2 • CAN/CSA-C22.2 No. 60950-00 • AS/NZS 3260-1993 • 21CFR1040
Network Equipment Building System (NEBS) and Environmental Standard Compliance	<ul style="list-style-type: none"> • GR-63-Core NEBS Level 3 • GR-1089-Core NEBS Level 3 • ETSI 300 019 Storage Class 1.1 • ETSI 300 019 Transportation Class 2.3 • ETSI 300 019 Stationary Use Class 3.1

Ordering Information

To place an order, visit the [Cisco Ordering Home Page](#) or refer to Table 3.

Table 3. Ordering Information

Product Name	Part Number
Cisco 7600 Series/Catalyst 6500 Series IPSec VPN Shared Port Adapter	SPA-IPSEC-2G
Cisco 7600 Series/Catalyst 6500 Series Services SPA Carrier-400	7600-SSC-400
Cisco 7600 Series/Catalyst 6500 Series Introductory Bundle: Includes 1 Cisco IPSec VPN SPA and 1 Cisco Services SPA Carrier-400	SPA-IPSEC-SSC400-1
Cisco 7600 Series/Catalyst 6500 Series Dual Bundle: Includes 2 Cisco IPSec VPN SPAs and 1 Cisco Services SPA Carrier-400	SPA-IPSEC-SSC400-2

Service and Support

Cisco Systems® offers a wide range of services programs to accelerate customer success. These innovative services programs are delivered through a unique combination of people, processes, tools, and partners, resulting in high levels of customer satisfaction. Cisco services help you protect your network investment, optimize network operations, and prepare your network for new applications to extend network intelligence and the power of your business. For more information about Cisco services, refer to [Cisco Technical Support Services](#) or [Cisco Advanced Services](#).

For More Information

For more information about the Cisco Services SPA Carrier-400 and the Cisco SPA/SIP portfolio, visit <http://www.cisco.com/go/spa> or contact your local Cisco account representative.

**Americas Headquarters**

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706
USA
www.cisco.com
Tel: 408 526-4000
800 553-NETS (6387)
Fax: 408 527-0883

Asia Pacific Headquarters

Cisco Systems, Inc.
168 Robinson Road
#28-01 Capital Tower
Singapore 068912
www.cisco.com
Tel: +65 6317 7777
Fax: +65 6317 7799

Europe Headquarters

Cisco Systems International BV
Haarlerbergpark
Haarlerbergweg 13-19
1101 CH Amsterdam
The Netherlands
www-europe.cisco.com
Tel: +31 0 800 020 0791
Fax: +31 0 20 357 1100

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at www.cisco.com/go/offices.

©2007 Cisco Systems, Inc. All rights reserved. CCVP, the Cisco logo, and the Cisco Square Bridge logo are trademarks of Cisco Systems, Inc.; Changing the Way We Work, Live, Play, and Learn is a service mark of Cisco Systems, Inc.; and Access Registrar, Aironet, BPX, Catalyst, CCDA, CCDP, CCIE, CCIP, CCNA, CCNP, CCSP, Cisco, the Cisco Certified Internetwork Expert logo, Cisco IOS, Cisco Press, Cisco Systems, Cisco Systems Capital, the Cisco Systems logo, Cisco Unity, Enterprise/Solver, EtherChannel, EtherFast, EtherSwitch, Fast Step, Follow Me Browsing, FormShare, GigaDrive, HomeLink, Internet Quotient, IOS, iPhone, IP/TV, iQ Expertise, the iQ logo, iQ Net Readiness Scorecard, iQuick Study, LightStream, Linksys, MeetingPlace, MGX, Networking Academy, Network Registrar, Packet, PIX, ProConnect, ScriptShare, SMARTnet, StackWise, The Fastest Way to Increase Your Internet Quotient, and TransPath are registered trademarks of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries.

All other trademarks mentioned in this document or Website are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (0705R)